


Description OCL Regular™ is our most economical cold oven chain lubricant, combining a high-quality natural graphite with a low-viscosity liquid carrier to deliver soft, lubricating graphite to all moving parts of your oven chain.

Our clean, fast-drying carrier ensures the only thing left behind is a high-quality, lubricating material that reduces wear and extends the operating life of your equipment.

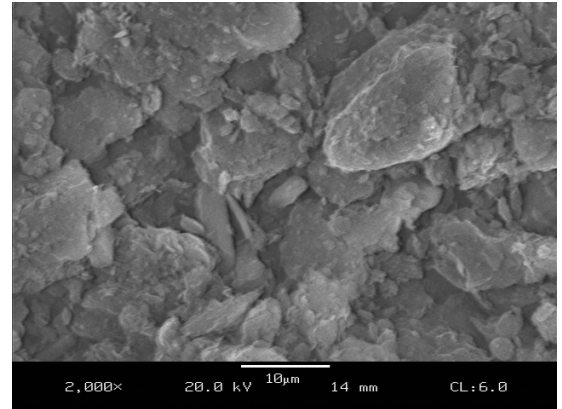

High-Resolution SEM of the Graphite Used in OCL Regular™

Advantages

- Quick-drying formula ensures uniform coverage and reduced down-time.
- Graphite particles remain behind to provide lubrication, long after additive-free or synthetic lubricants dry out or drop off.
- OCL Regular™ is supplied in a ready-to-use dilution - just brush, dip, or spray it on the chain.

Typical Properties

Solids Content:	25%
Primary Additive:	13 µm Natural Graphite
Carrier:	Petroleum Distillate
Brookfield Viscosity:	136 Centipoise [cP]
Flash Point:	176 °F

Application OCL Regular™ should be thoroughly mixed before use. Lubricant is supplied in a ready-for-use state, do not dilute.

Precautions Oven temperature must be below 150°F before lubricant is applied. All sources of ignition, including smoking materials, must be extinguished before application. Exhaust fans must be running and inspection doors and steam dampers must be open before and during lubrication. Maintain adequate ventilation until all vapors are exhausted. Do not close oven doors after lubrication until oven has been reheated to baking temperatures.

Shelf Life Two years from date of manufacture.

Packaging [4] 1 Gallon Cans Per Case, 5 Gallon Pails.